



問題集

http://www.ktest.jp 1年で無料進級することに提供する Exam : 640-893


Title: Supporting Cisco Data

Center System Devices

(DCTECH) v1.0

Version: Demo

1.Refer to the exhibit

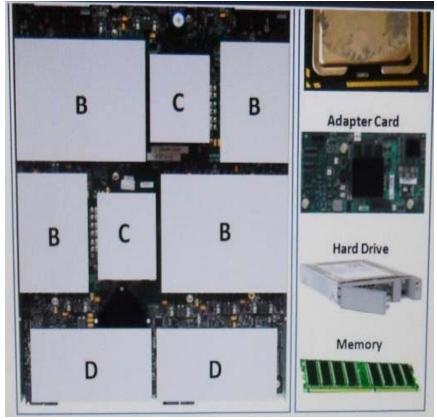

The pictures on the fight ate the internal components of the Cisco UCS 6250 Blade Server Which component image should be applied to which empty component block?

- A. CPU for block A, adapter card for block B, hard drive for block C. memory for block D
- B. CPU for block C. adapter card for block D, hard drive for block A. memory for block B
- C. CPU for block B, adapter card for block C, hard drive for block D, memory for block B
- D. CPU for block D. adapter card for block A. hard drive for block B. memory for block C

Answer: A

2. Which two commands or key sequences display a list of the available commands in the Cisco NXOS prompt UCS-switch (nxos) #.? (Choose two)

A. Tab (key)

B. help


C. ?

D. ~ (tilde key)

E. w

Answer: B,C

3.Refer to the exhibit

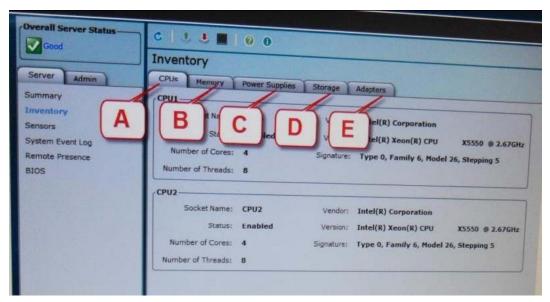

Which tab displays the hard disk drives that are installed1?

- A. A-CPUs
- B. B Memory
- C. Power Supplies
- D. D Storage
- E. E -Adapters

Answer: D

- 4. When the Cisco UCS Manager is used to verify the B- or C-Series device types of Overall Status are acceptable and do not indicate failure? (Choose two.)
- A. Online
- B. OK
- C. Unassociated
- D. Active

Answer: B,C


- 5. Which cable is used to access the command-line interface of a Cisco UCS 6120XP Fabric Interconnects?
- A. KVM cable
- B. console cable
- C. Ethernet cable
- D. SFP+ Ethernet transceiver cable

Answer: B

- 6. Which cable is used to access the command-line -interface of a Cisco UCS 6120XP Fabric Interconnects?
- A. KVM cable
- B. console cable
- C. Ethernet cable
- D. SFP+ Ethernet transceiver cable

Answer: B

7.

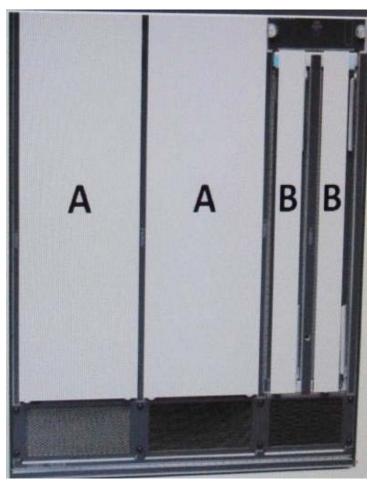

A. Block A, power supply. Block B is a supervisor module

B. Block A is switching module, Block B is a fan try

Answer: A

- 8.From the Cisco NX-OS prompt"UCS-switch (nxos) #, which command displays the Cisco NX-OS configuration that is currently in use?
- A. show configuration
- B. show startup-config
- C. show boot-config
- D. show mem-config
- E. show running-config

Answer: E

- 9. Which action should the administrator take before physically removing a blade server for maintenance or replacement?
- A. Force the server to shut down
- B. Disassociate the service profile
- C. Decommission the server

D. Perform a graceful shutdown of the server

Answer: B

10. Which command-line interface mode is best described by this prompt?

UCS-switch-A (nxos)#

A. maintenance mode

B. EXEC mode

C. local management mode

D. global configuration mode

E. Cisco IOS mode

Answer: A