

KTest

更に上のクオリティ 更に上のサービス



問題集

<http://www.ktest.jp>

1年で無料進級することに提供する

Exam : 642-533

**Title : Implementing Cisco
Intrusion Prevention System
(IPS)**

Version : Demo

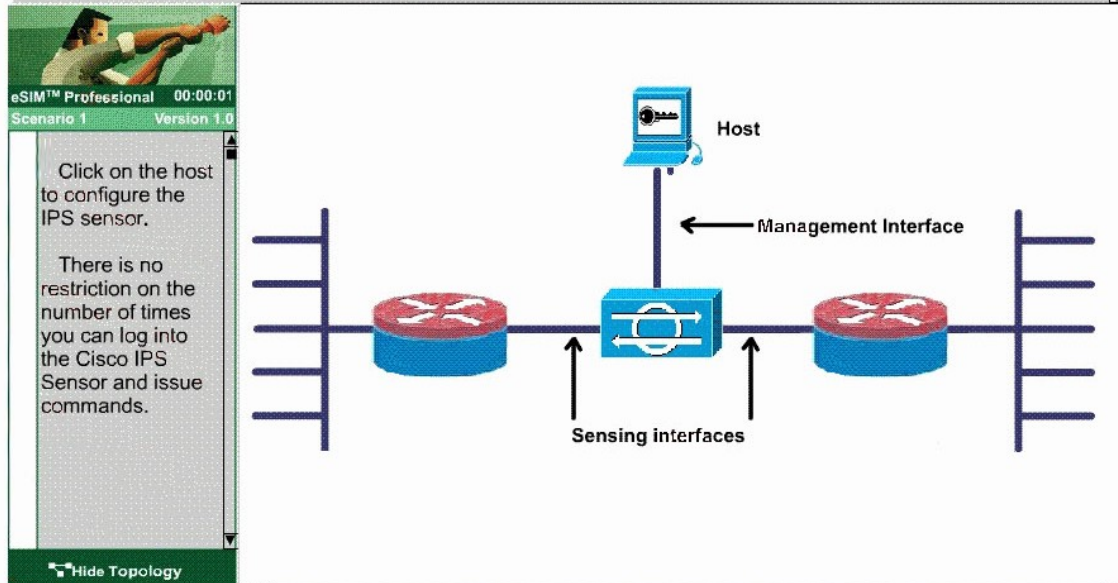
1. You think users on your corporate network are disguising the use of file-sharing applications by tunneling the traffic through port 80. How can you configure your Cisco IPS Sensor to identify and stop this activity?
- A. Enable all signatures in the Service HTTP engine.
 - B. Assign the Deny Packet Inline action to all signatures in the Service HTTP engine.
 - C. Enable all signatures in the Service HTTP engine. Then create an event action override that adds the Deny Packet Inline action to events triggered by these signatures if the traffic originates from your corporate network.
 - D. Enable the alarm for the non-HTTP traffic signature. Then create an Event Action Override that adds the Deny Packet Inline action to events triggered by the signature if the traffic originates from your corporate network.
 - E. Enable both the HTTP application policy and the alarm on non-HTTP traffic signature. Answer: E
2. A user with which user account role on a Cisco IPS Sensor can log into the native operating system shell for advanced troubleshooting purposes when directed to do so by Cisco TAC?
- A. administrator
 - B. operator
 - C. viewer
 - D. service
 - E. root
 - F. super
- Answer: D
3. Which character must precede a variable to indicate that you are using a variable rather than a string?
- A. percent sign
 - B. dollar sign
 - C. ampersand
 - D. pound sign
 - E. asterisk
- Answer: B
4. Which statement accurately describes Cisco IPS Sensor automatic signature and service pack updates?
- A. The Cisco IPS Sensor can automatically download service pack and signature updates from Cisco.com.
 - B. The Cisco IPS Sensor can download signature and service pack updates only from an FTP or HTTP server.
 - C. You must download service pack and signature updates from Cisco.com to a locally accessible server before they can be automatically applied to your Cisco IPS Sensor.
 - D. When you configure automatic updates, the Cisco IPS Sensor checks Cisco.com for updates hourly.
 - E. If multiple signature or service pack updates are available when the sensor checks for an update, the Cisco IPS Sensor installs the first update it detects.
- Answer: C

5. LAB

You are the network administrator in charge of the IPS sensors for a travel agency. You have upgraded to IPS software version 6.0.

On the morning of May 24, 2007, your assistant notified you that he recently tried to tune some of the signatures for sig0 in an effort to mitigate attacks. From the assistant description of the tuning he performed, you decided that there is a need to return all signatures for sig0 to their default settings.

After returning all the signatures for sig0 to the default setting, backing up of the current configurations is also

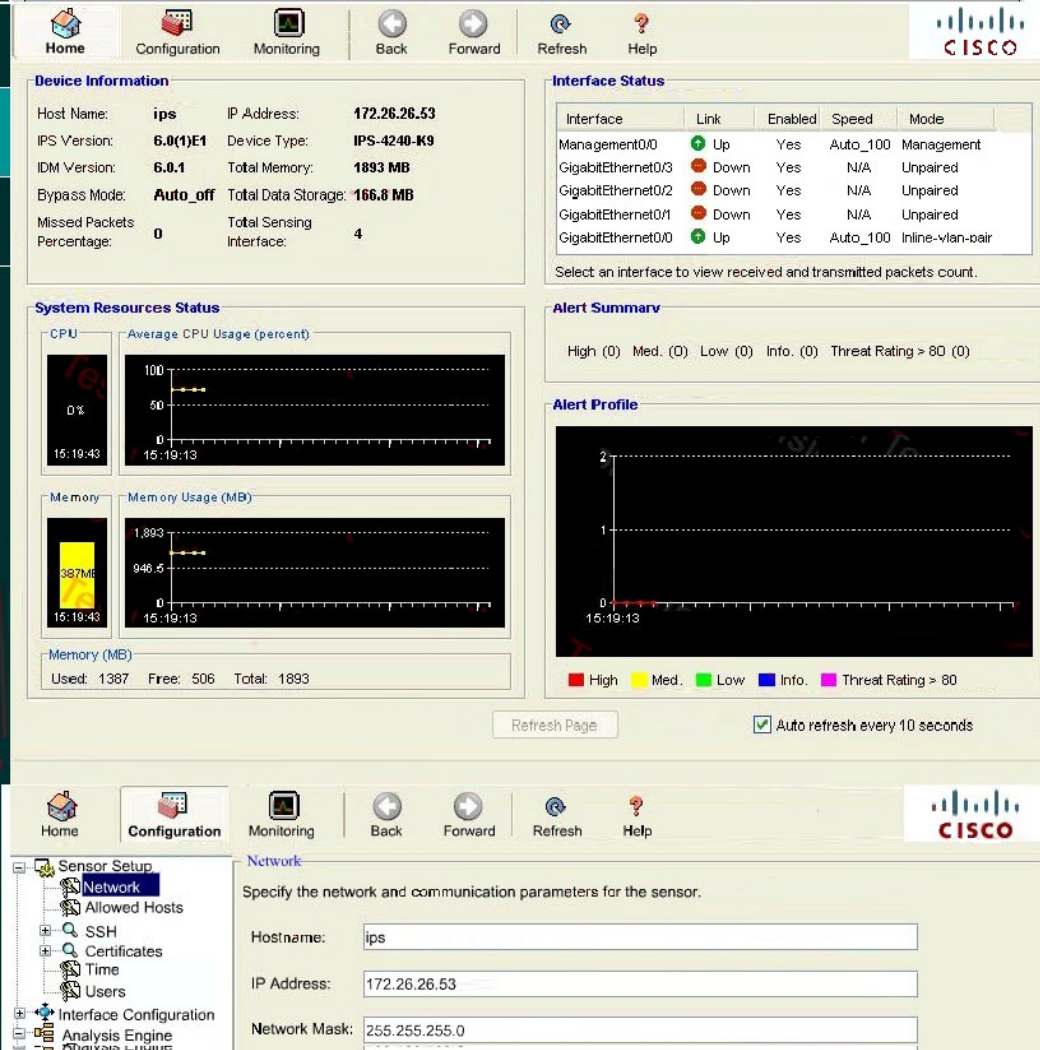
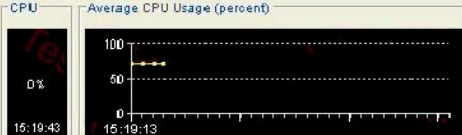
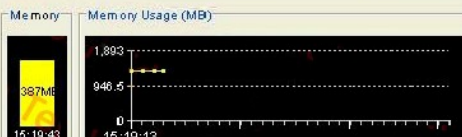



Answer: Sorry , No Correct Answer!

6. LAB

Answer: Sorry , No Correct Answer!

Scenario	<p>You are the network administrator for a shoe manufacturer. The company has a DMZ network consisting of a mission-critical web server and a DNS server. You want to configure the inline 4240 sensor protecting these servers to place the highest possible value on the web server and DNS server. This will increase the risk rating of attacks against these two servers on the DMZ. You want to then configure the sensor to deny all connections with a risk rating of 80 or above if the connection attempt triggers any signature. You want to exempt your management station from this policy so that traffic from the management station is not dropped. These configurations will be done on the rules0 instance.</p> <p>Complete the following tasks:</p> <ul style="list-style-type: none">Assign the highest rating to the DMZ Web and DNS serverDeny all connections if Risk Rating is 80 or above and exempt the Management Station traffic from this policy
IPS Sensor	
Topology	

Scenario	 <p>The dashboard displays various system resources and configuration options. The top navigation bar includes Home, Configuration, Monitoring, Back, Forward, Refresh, and Help. The main content area is divided into several sections: Device Information, Interface Status, System Resources Status, Alert Summary, and Alert Profile. The Configuration section is currently selected, showing the Network configuration page.</p>																																
IPS Sensor																																	
Topology																																	
Device Information	Host Name: ips IP Address: 172.26.26.53 IPS Version: 6.0(1)E1 Device Type: IPS-4240-K9 IDM Version: 6.0.1 Total Memory: 1893 MB Bypass Mode: Auto_off Total Data Storage: 166.8 MB Missed Packets Percentage: 0 Total Sensing Interface: 4	Interface Status	<table border="1"><thead><tr><th>Interface</th><th>Link</th><th>Enabled</th><th>Speed</th><th>Mode</th></tr></thead><tbody><tr><td>Management0/0</td><td>Up</td><td>Yes</td><td>Auto_100</td><td>Management</td></tr><tr><td>GigabitEthernet0/3</td><td>Down</td><td>Yes</td><td>N/A</td><td>Unpaired</td></tr><tr><td>GigabitEthernet0/2</td><td>Down</td><td>Yes</td><td>N/A</td><td>Unpaired</td></tr><tr><td>GigabitEthernet0/1</td><td>Down</td><td>Yes</td><td>N/A</td><td>Unpaired</td></tr><tr><td>GigabitEthernet0/0</td><td>Up</td><td>Yes</td><td>Auto_100</td><td>Inline-vlan-pair</td></tr></tbody></table>	Interface	Link	Enabled	Speed	Mode	Management0/0	Up	Yes	Auto_100	Management	GigabitEthernet0/3	Down	Yes	N/A	Unpaired	GigabitEthernet0/2	Down	Yes	N/A	Unpaired	GigabitEthernet0/1	Down	Yes	N/A	Unpaired	GigabitEthernet0/0	Up	Yes	Auto_100	Inline-vlan-pair
Interface	Link	Enabled	Speed	Mode																													
Management0/0	Up	Yes	Auto_100	Management																													
GigabitEthernet0/3	Down	Yes	N/A	Unpaired																													
GigabitEthernet0/2	Down	Yes	N/A	Unpaired																													
GigabitEthernet0/1	Down	Yes	N/A	Unpaired																													
GigabitEthernet0/0	Up	Yes	Auto_100	Inline-vlan-pair																													
System Resources Status	<p>CPU Average CPU Usage (percent)</p>  <p>0% 15:19:43</p> <p>Memory Memory Usage (MB)</p>  <p>387MB 15:19:43</p> <p>Used: 1387 Free: 506 Total: 1893</p>	Alert Summary	High (0) Med. (0) Low (0) Info. (0) Threat Rating > 80 (0)																														
Alert Profile	 <p>15:19:13</p> <p>Legend: High (Red), Med. (Yellow), Low (Green), Info. (Blue), Threat Rating > 80 (Pink)</p>	Refresh Page <input checked="" type="checkbox"/> Auto refresh every 10 seconds																															
Configuration	<p>Network</p> <p>Specify the network and communication parameters for the sensor.</p> <p>Hostname: <input type="text" value="ips"/></p> <p>IP Address: <input type="text" value="172.26.26.53"/></p> <p>Network Mask: <input type="text" value="255.255.255.0"/></p>																																

Virtual Sensors

Global Variables

Policies

Blocking

SNMP

General Configuration

Traps Configuratoion

External Product Interface

Auto Update

Restore Defaults

Reboot Sensor

Shutdown Sensor

Update Sensor

Licensing

Scenario

IPS Sensor

Topology

The image shows the Cisco IPS configuration interface and a network topology diagram. The interface includes a left sidebar with a tree view of configuration options: Virtual Sensors, Global Variables, Policies, Blocking, SNMP, General Configuration, Traps Configuratoion, External Product Interface, Auto Update, Restore Defaults, Reboot Sensor, Shutdown Sensor, Update Sensor, and Licensing. The main area displays configuration fields: Default Route (172.26.26.151), FTP Timeout (300), and checkboxes for Web Server Settings (Enable TLS/SSL) and Remote Access (Enable Telnet). Below these are 'Apply' and 'Reset' buttons. The topology diagram shows a Management station (10.0.1.12) connected to a Corporate Network Sensor, which is connected to a DMZ Sensor. The DMZ Sensor is connected to a router, which is connected to the Internet. The router is also connected to a WWW server (172.16.1.3) and a DNS server (172.16.1.4).

7. How can you clear events from the event store?

- A. You do not need to clear the event store; it is a circular log file, so once it reaches the maximum size it will be overwritten by new events.
- B. You must use the CLI clear events command.
- C. If you have Administrator privileges, you can do this by selecting Monitoring > Events > Reset button in Cisco IDM.
- D. You should select File > Clear IDM Cache in Cisco IDM.
- E. You cannot clear events from the event store; they must be moved off the system using the copy command.

Answer: B

8. Refer to the exhibit. Based on the partial output shown, which of these statements is true?

Mod	Card Type	Model
0	ASA 5540 Adaptive Security Appliance	ASA5540
1	ASA 5500 Series Security Services Module-20	ASA-SSM-20

Mod	MAC Address Range	Hw Version	Fw Ver	Sw Ver
0	000b.fcf8.c538 to 000b.fcf8.c53c	1.0	1.0(10)0	7.3(0)149
1	000b.fcf8.0144 to 000b.fcf8.0144	1.0	1.0(10)0	6.0(1)E1

Mod	Status	Data Plane Status	Compatibility
0	Up Sys	Not Applicable	
1	Up	Up	

- A. The module installed in slot 1 needs to be a type 5540 module to be compatible with the ASA 5540 Adaptive Security Appliance module type.
- B. The module installed in slot 1 needs to be upgraded to the same software revision as module 0 or it will not be recognized.
- C. Module 0 system services are not running.
- D. There is a Cisco IPS security services module installed.

Answer: D

9. Which action does the copy /erase ftp://172.26.26.1/sensor_config01 current-config command perform?

- A. erases the sensor_config01 file on the FTP server and replaces it with the current configuration file from the Cisco IPS Sensor
- B. copies and saves the running configuration to the FTP server and replaces it with the source configuration file
- C. overwrites the backup configuration and applies the source configuration file to the system default configuration
- D. merges the source configuration file with the current configuration

Answer: C

10. Which of the following is a valid file name for a Cisco IPS 6.0 system image?

- A. IPS-K9-pkg-6.0-sys_img.sys
- B. IPS-4240-K9-img-6.0-sys.sys
- C. IPS-K9-cd-11-a-6.0-1-E1.img

D. IPS-4240-K9-sys-1.1-a-6.0-1-E1.img

Answer: D